

This drawing is to be read in conjunction with the respective arboricultural schedules and reports relevant to this project.

Where contradictions between this drawing and any other design information becomes apparent, the respective authors should be contacted immediately.

It is the responsibility of the main site contractor to check and verify all information and measurements onsite and confirm prior to the commencement of works, and to ensure that all site operatives work in accordance with respective arboricultural reports and BS5837:2012. Trees in relation to design, demolition and construction.

BS5837:2012 Tree Categorisation

- Category A**
Trees of high quality with an estimated remaining life expectancy of at least 40 years
- Category B**
Trees of moderate quality with an estimated life expectancy of at least 20 years
- Category C**
Trees of low quality with an estimated life expectancy of at least 10 years, or young trees with a stem diameter below 150mm
- Category U**
Those in such a condition that they cannot realistically be retained as living trees in the context of the current land use for longer than 10 years

Key


- Root Protection Areas**
The minimum area around a tree deemed to contain sufficient roots and rooting volume to maintain the trees viability.
- Tree, Woodland, Shrub or Hedgerow Group.**
- T2**
Reference Number for Tree, Group or Hedgerow.
- Tree Protection Zone - Protective fencing to be installed as per Specification. Designated Construction Exclusion Zone.**
- Excavation works to be carried out under arboricultural supervision highlighted in cyan.**
- 3 no. trees to be removed following detailed bat assessments and recommended mitigation measures.**

Trees located off-site. Notify owner to remove T232 due to its poor condition.

Due to bat potential - prior to removing the tree, it will require 2 emergence/re-entry surveys between May and September in accordance with BCT guidance or will require an endoscope survey of potential roosting features.

Due to bat potential - soft felling is recommended, where tree limbs are cut and left grounded overnight to allow any bats to make their way out. Works must be carried out in September/October.

Tree Protection Specification - Above ground stabilizing system

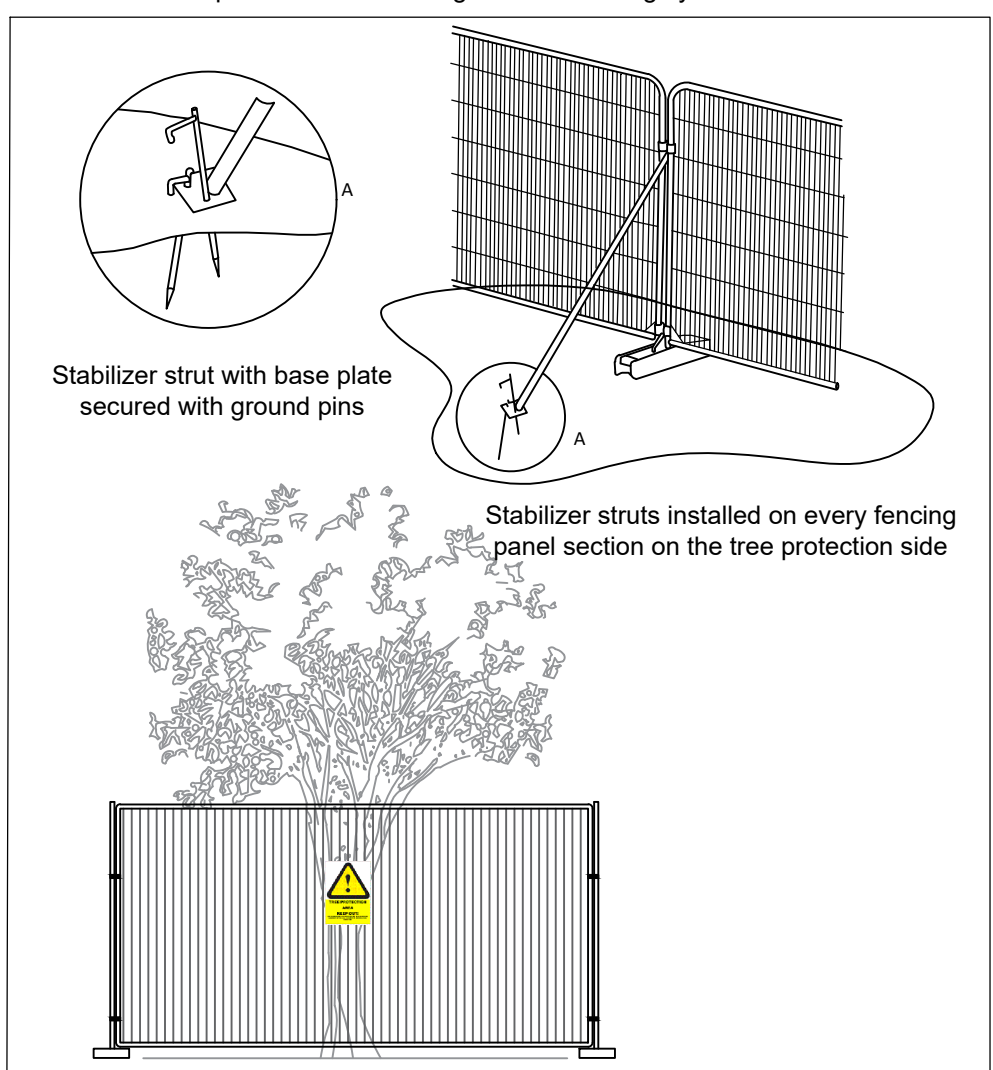

BS5837:2012 Figure 3

Due to bat potential - prior to removing the tree, it will require 2 emergence/re-entry surveys between May and September in accordance with BCT guidance or will require an endoscope survey of potential roosting features.

A Apr 2024 Updated layout

Revision Date Description

Title:

Tree Protection Plan

Project:

Newtownholmes Road, Caltragh

Client:

John Walter Burke

Date: Aug 2023

Scale: 1:500 @ A1

Status: Planning

Drawn by: CMcC

Checked by: CMcC

230320-P-12

Rev: A

This drawing is the copyright of Charles McCorkell Arboricultural Consultancy has been produced for the client and project as listed above. The drawing may not be reproduced or amended, except by the written permission of Charles McCorkell Arboricultural Consultancy. No liability will be accepted for any amendments made by other persons. ©

CHARLES MCCORKELL
ARBORICULTURAL CONSULTANCY

T: 085 843 7015 / E: charles@cmarbor.com / W: www.cmarbor.com